


TOLI select

MADE TO ORDER

SPC CLICK TILE LOOSELAY TILE LVT

Product Guide for TOLI select
made-to-order Tiles

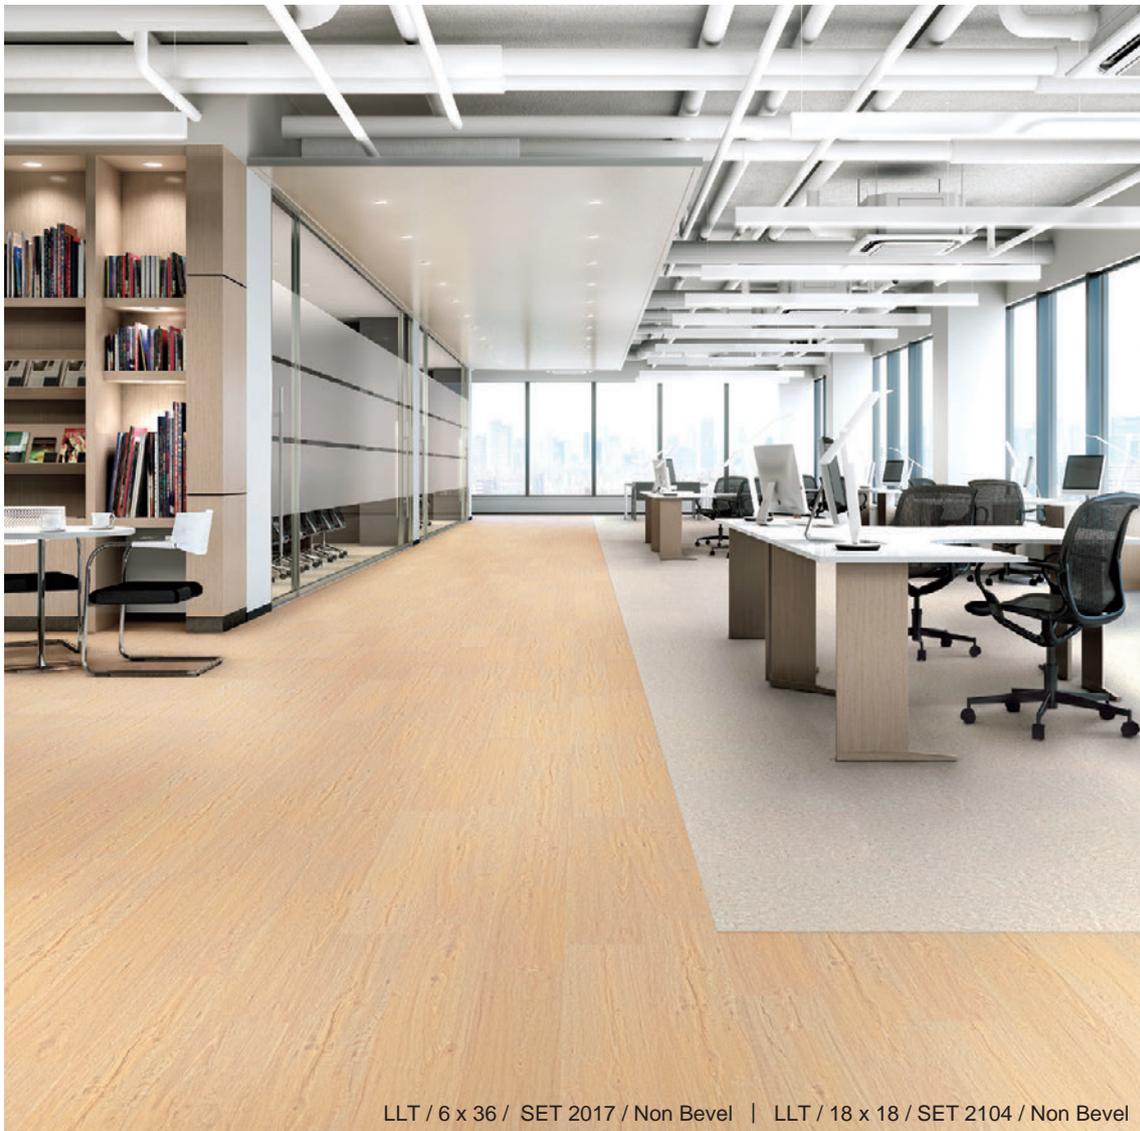


LLT / 6 x 36 / SET 2017 / Non Bevel | LLT / 18 x 18 / SET 2104 / Non Bevel




LOOSELAY TILE

5mm thick LOOSELAY TILE has an excellent dimensional stability supported by glass fiber interlayer. And it will cover up subfloor irregularity after installation. It is also strongly recommended to use raised floor, and it can be well-coordinated with carpet tiles. It will support rearrangement of floor plan with its reusable property together with tackifier adhesive.

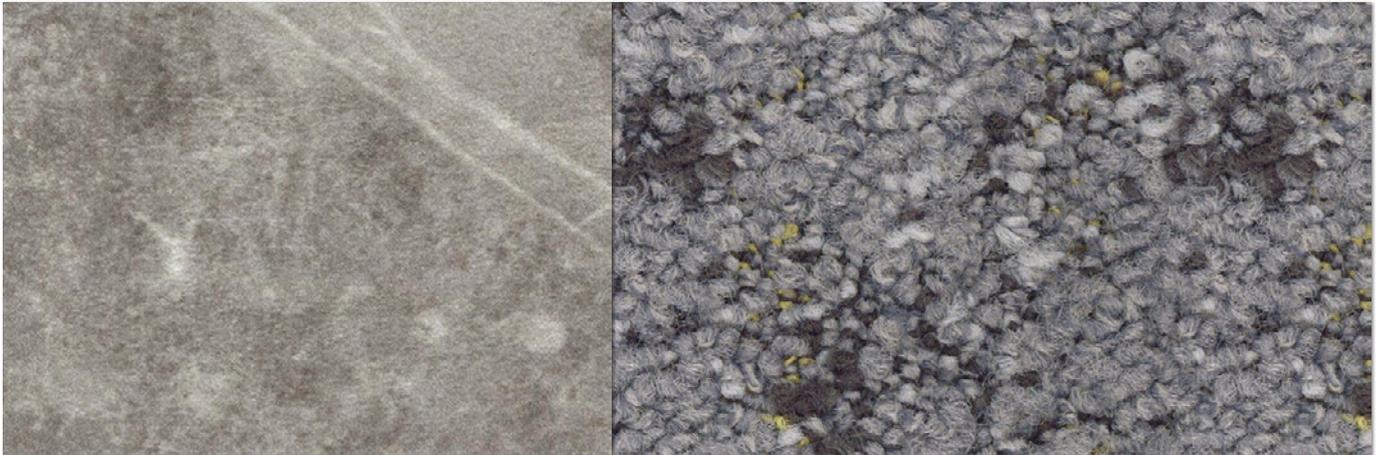

SPC CLICK TILE

Tiles will get tightly joined together by tongue-and-groove joints. Convenient installation with no use of adhesive is much advantageous, as well as easy maintenance. It also shows an excellent durability against traffic. It can be used for many applications.

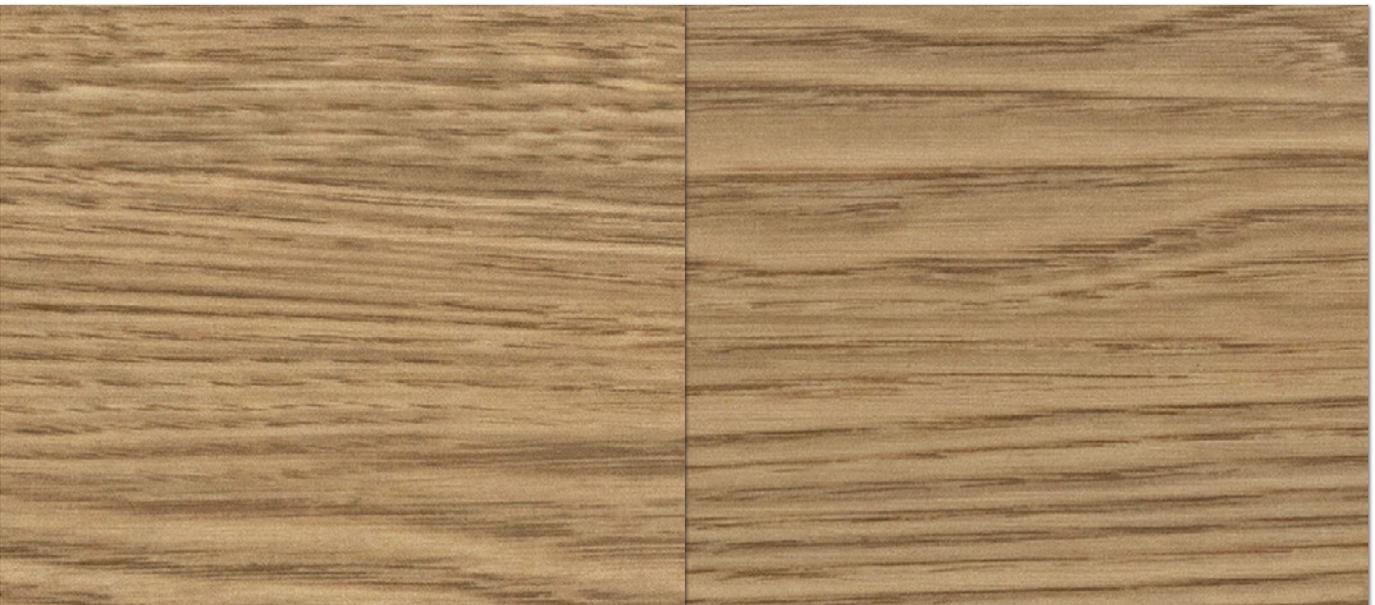

TOLI select is made-to-order resilient floor tile series. Design and color can be selected from many variations. Flooring type also can be selected from the series of SPC CLICK TILE, LOOSELAY TILE and LVT. TOLI select is characterized by its abundant designs and sizes. Enjoy the ease of installation and maintenance. TOLI select is suitable for the use at residence, office, hotel, school, commercial or many other facilities.

Ordering Guide for TOLI select

1 Select Product Category

Select your preferred product from SPC, LLT, and LVT.
(e.g. SPC)



2 Select Size

Please refer to the Chart below and select your preferred size.
(e.g. 12x24)

[Product Size Chart] ○ : available

in	12.09 x 24.02	7.09 x 47.99	8.94 x 47.99	12 x 18	18 x 18
mm	307 x 610	180 x 1219	227 x 1219	304.8 x 457.2	457.2 x 457.2
SPC	○	○	○	—	—
LLT	—	—	—	—	○
LVT	—	—	—	○	○

in	18 x 24	18 x 36	6 x 36	7.25 x 48	9 x 48
mm	457.2 x 609.6	457.2 x 914.4	152.4 x 914.4	184.1 x 1219.2	228.6 x 1219.2
SPC	—	—	—	—	—
LLT	○	○	○	○	○
LVT	○	○	○	○	○

3 Select Color Code


Select your preferred color code.
(e.g. SET2001)



4 Select Wear Layer

Select your preferred wear layer from 0.3mm or 0.5mm.
(e.g. 0.3mm)


* SPC and LLT are available only in 0.5 mm.



5 Select Beveling

Select your preferred bevel from Fine bevel or Non bevel.
(e.g. Fine bevel)

* SPC and LVT wear layer with 0.3mm is available only in non-bevel.



6 Completed!

Reconfirm your selecting details before your order.
Thank you so much for selecting TOLI Select !

(e.g. SPC / 12.09 x 24.02 / SET2001
LLT / 6 x 36 / SET2014 / Fine Bevel
LVT / 7.25 x 48 / SET2007 / 0.5mm / Non Bevel)



SET2001

AGED OAK



SET2002

GREYISH OAK



SET2003

AMERICAN WALNUT



SET2004

TINTED MAPLE



SET2005

FADED PINE



SET2006

SMOKY OAK



LVT / 6 x 36 / SET 2001 / 0.3mm



LLT / 7.25 x 48 / SET 2012 / Fine Bevel



SET2007

MATURED ELM



SET2011

ROUGH SAWN OAK



SET2008

WHITEWASHED OAK



SET2012

BURNT OAK



SET2009

AGED PINE



SET2013

DUSK MAPLE



SET2010

GRUNGE WOOD



SET2014

OAK NOIR



SET2015

QUEBEC MAPLE



SET2018

BRIGHT ROSE WOOD



SET2016

CINNAMON OAK



SET2019

ENGLISH OAK



SET2017

SCANDINAVIAN OAK



SET2020


VINTAGE OAK




LVT / 6 x 36 / SET 2018 / 0.5mm / Non Bevel



SPC / 7.09 x 47.99 / SET 2019

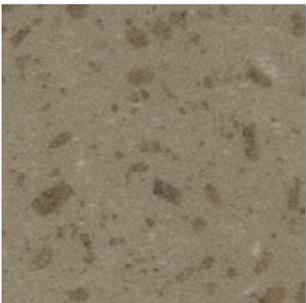

SET2101 **GREY
TERRAZZO**

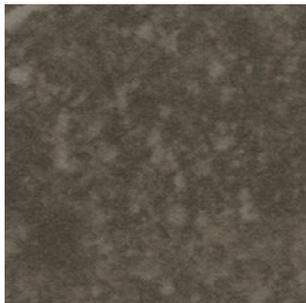

SET2102 **GROUND
THUNDER**

SET2103 **MERCURY**



SET2104 **OGRE
LIMESTONE**



SET2105 **WEATHERED
LIMESTONE**



SET2106 **ROMAN MARBLE**



SET2108 **PRESTIGE
CONCRETE**



SET2109 **PRIME
GRANITE**



SET2107 **SHADING MARBLE**

Installation method

LOOSELAY TILE (LLT)

Installation method	subfloor	Adhesive	Coverage
Tackifier-adhesive installation method	Stainless steel, vinyl raised flooring, vinyl flooring	Eco GA Cement	40 ~ 60g/m ²
	Dry mortar, wood flooring, Plywood	Eco GA Cement	60 ~ 100g/m ²

Luxury Vinyl Tile (LVT)

Installation method	subfloor	Adhesive	Coverage
Ordinary installation	Dry concrete and mortar	TOLI Eco AR600	300g/m ²
Installation method on humid concrete or mortar	Humid concrete or mortar	2-part moisture-resistant adhesive	—

Notes on selection & installation

There are slight shadings of color and pattern in every single tile. Such difference is not a manufacturing defect, and rather, makes whole floor look natural.

During installation, check the direction of arrows printed on the backing and keep the room temperature at 20°C or higher. The temperature change should be within 15°C. Floor tiles should be unpacked and placed at the job site 48 hours prior to the installation for adaptation to the temperature.

Pale-colored tiles will look dirtier when stained, than dark-colored ones. Compared to smooth-surfaced tiles, those with deeper emboss will trap dirt more easily.

During maintenance after installation, clean the floor with detergent. After rinsing with wet mop and drying, apply resin wax.

At initial maintenance, it's important to clean the floor surface thoroughly before waxing. According to traffic condition, increase the frequency of daily maintenance by mop or broom.

TOLI Corporation - Global Department

2-10-4 Higashi-Shinbashi, Minato-ku, Tokyo,
105-0021, Japan
Phone : +81-3-5403-2078
Fax : +81-3-5472-6307
<https://toli-overseas.com/>


TOLI Corporation Singapore Branch


1 North Bridge Road, #21-10, High Street Centre,
179094, Singapore
Phone : +65-3138-5052
Fax : +65-6491-5234
<https://toli-overseas.com/>


TOLI (SHANGHAI) Corporation

Room 314, Building 1, No.55 Yuyao Rd., Jingan
ShangHai 200040 China
Phone : +86-21-6071-0688
Fax : +86-21-6071-0560
<http://www.tolish.com.cn>

Dimensions for made-to-order

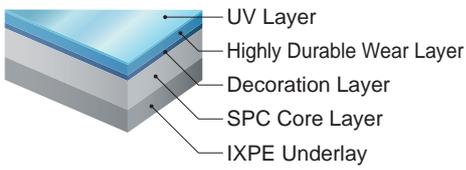Type	SPC CLICK TIILE
Dimensions (in)	12.09 x 24.02 7.09 x 47.99 8.94 x 47.99
Dimensions (mm)	307 x 610 180 x 1219 227 x 1219
Thickness	5.0mm Wear layer 0.5mm (UV-reinforced coat)
Structural diagram	

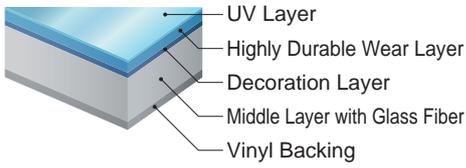Type	LOOSELAY TILE (LLT)
Dimensions (in)	18 x 18 18 x 24 18 x 36 6 x 36 7.25 x 48 9 x 48
Dimensions (mm)	457.2 x 457.2 457.2 x 609.6 457.2 x 914.4 152.4 x 914.4 184.1 x 1219.2 228.6 x 1219.2
Thickness	5.0mm Wear layer 0.5mm (UV-reinforced coat)
Structural diagram	

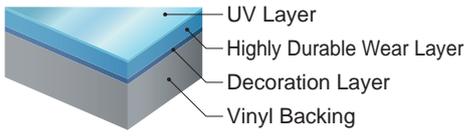Type	Luxury Vinyl Tile (LVT)
Dimensions (in)	12 x 18 18 x 18 18 x 24 18 x 36 6 x 36 7.25 x 48 9 x 48
Dimensions (mm)	304.8 x 457.2 457.2 x 457.2 457.2 x 609.6 457.2 x 914.4 152.4 x 914.4 184.1 x 1219.2 228.6 x 1219.2
Thickness	3.0mm Wear layer 0.3mm (UV-reinforced coat) Wear layer 0.5mm (UV-reinforced coat)
Structural diagram	

M.O.Q.	100m ²
Lead time	3 weeks *

* Lead time may fluctuate according to order quantity.
For updated information, contact TOLI sales rep.

TOLI Corporation is certified to ISO9001

Please dispose of sample books that are no longer needed in accordance with the laws and regulations of your country.

<https://toli-overseas.com>

Through product search engine content, you can download product image.

2022.09 **Promotion aid for professional use only**